



TP P3.9-7.8

Innovative Indoor Transparent LED Display

**RELEASE
YOUR
CREATIVITY**





Super Light

Only **9Kg/m²**

75%

weight less than traditional led display


Only **10kg/m²** for steel structure

80%

weight less than steel structure for traditional led display




transparency

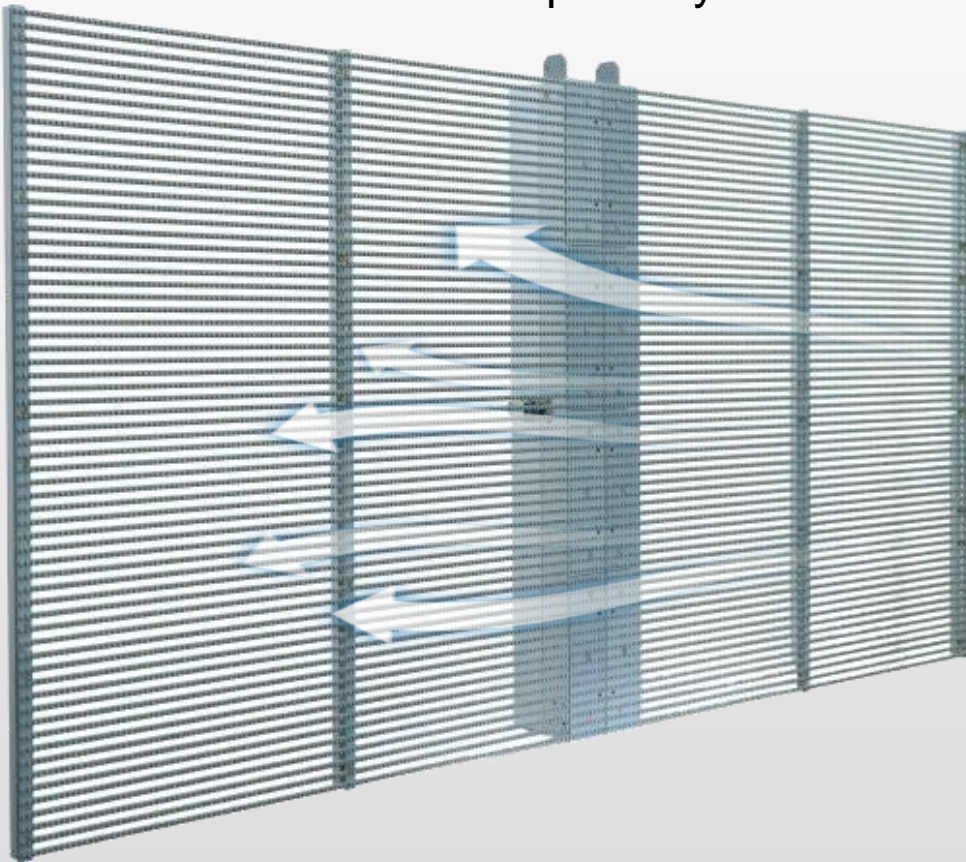

55%~78% transparency

Advantages:

- 1.Keep lighting for building inside
- 2.Keep wind through from transparent led display
- 3.Less weight

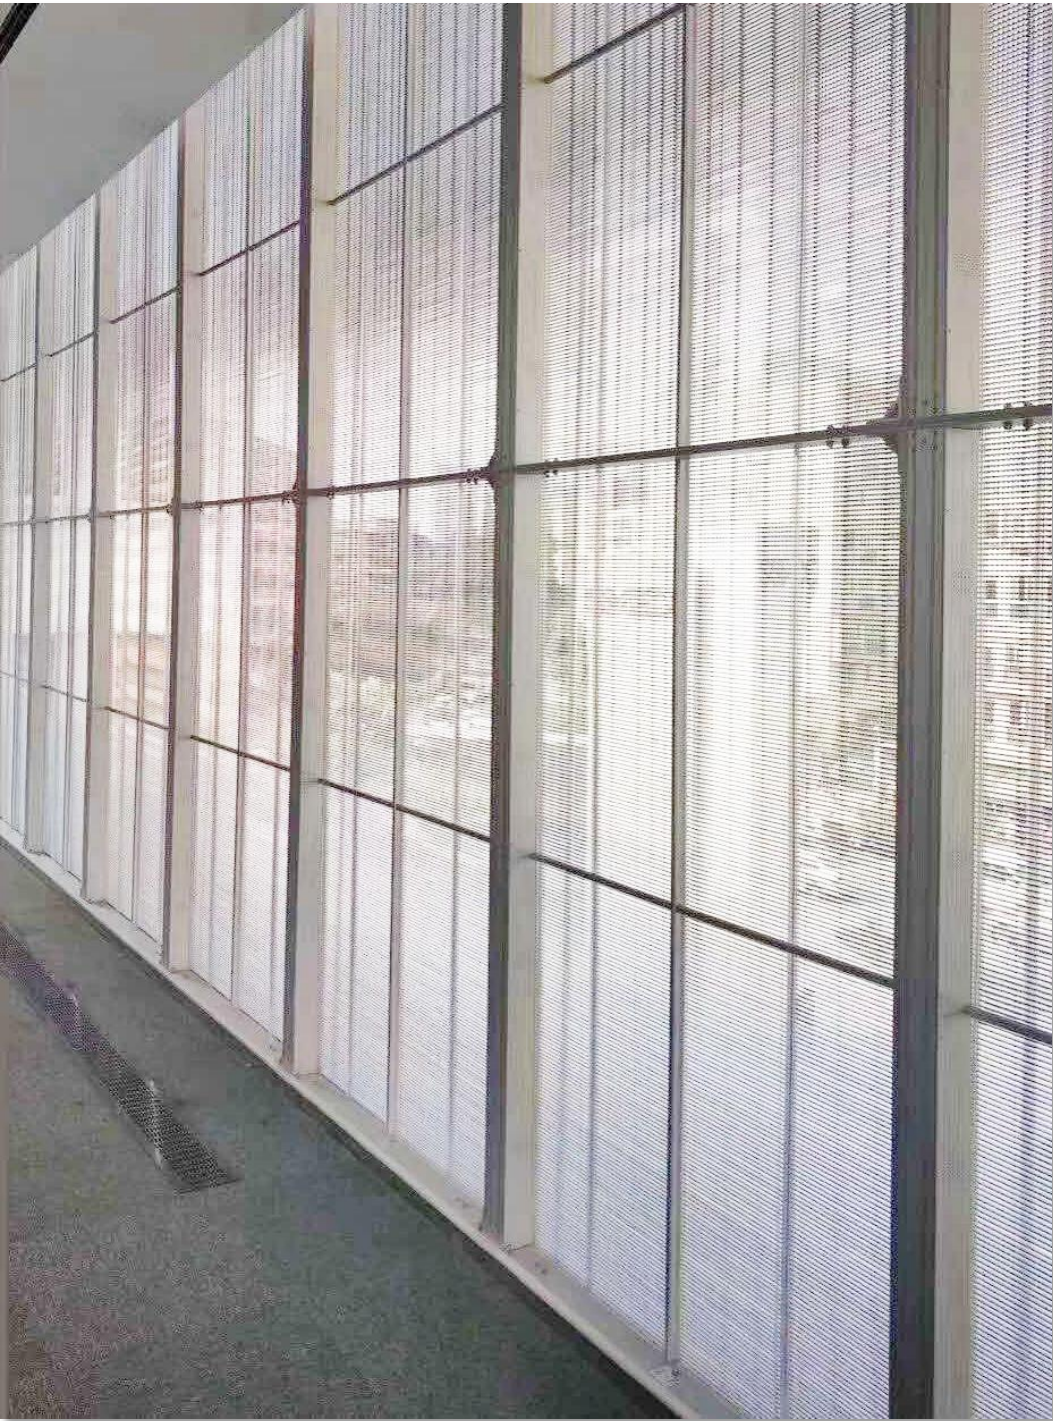

Now, let's check how much we can save with it....

1. Steel structure cost, **70% save**


2. Labor cost, **80% save**

3. Shipment cost, **75% save**


4. Maintenance and operation cost, **80% save**

5. Electricity cost, **70% save**



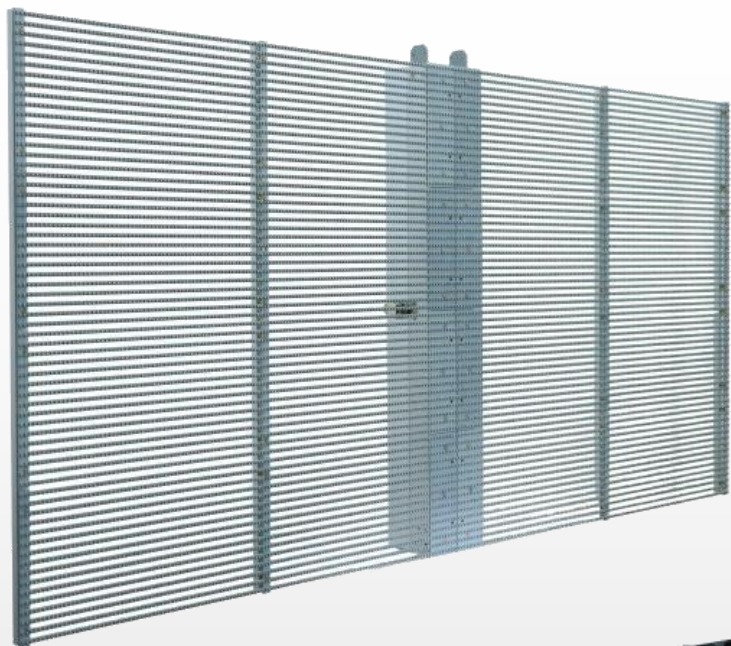

Black color and white
color frame as option

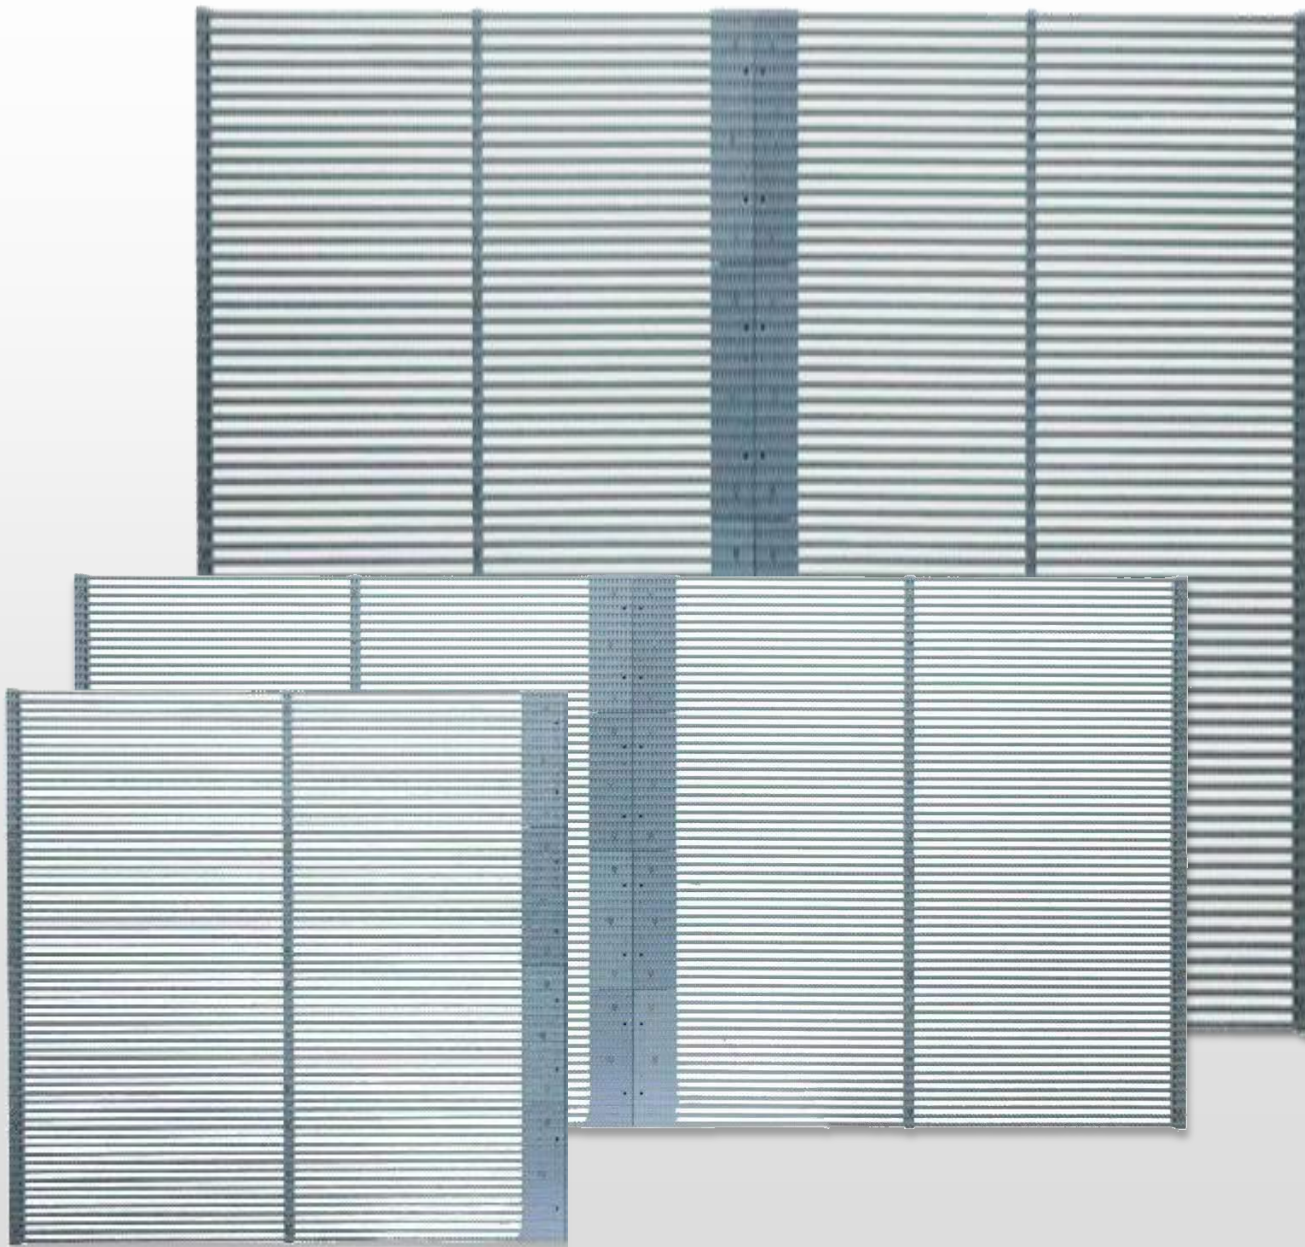

Size customization available

This product unit panel size can well customize according to real window/site size/situation to make it 100% suit with buildings.




**Design customization
available**

This product can well accept for
customized irregular shape, like
led cube, led column, curved led,
etc.



Installation Method:stack


Application: store showcase, CBD building, airport, station, shopping mall

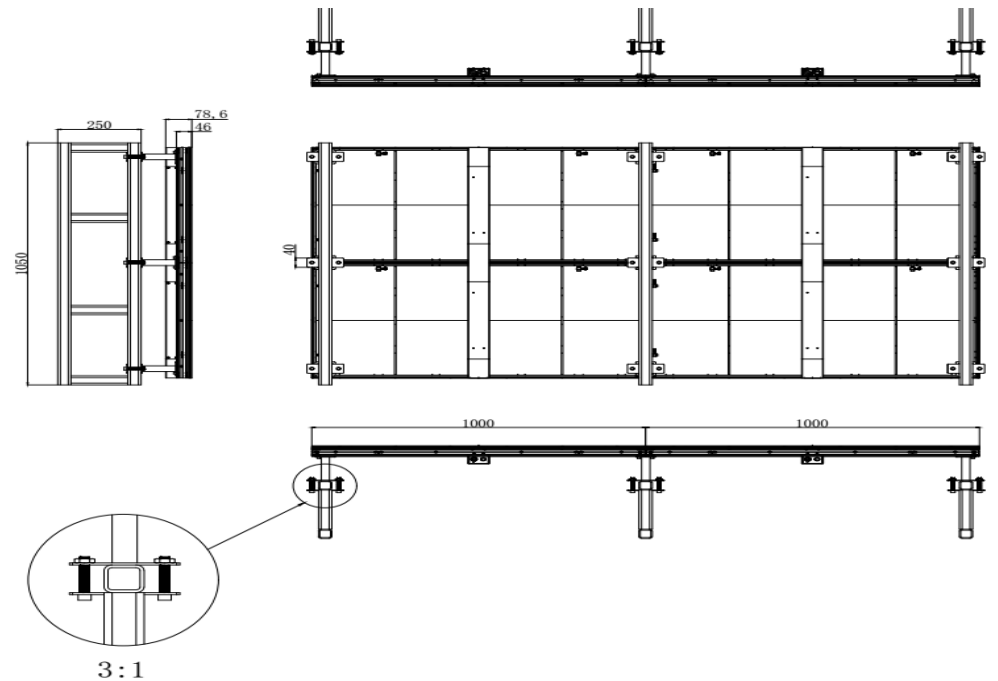



Installation Method: Hanging


Application: stage, store, night bar, club, science museum

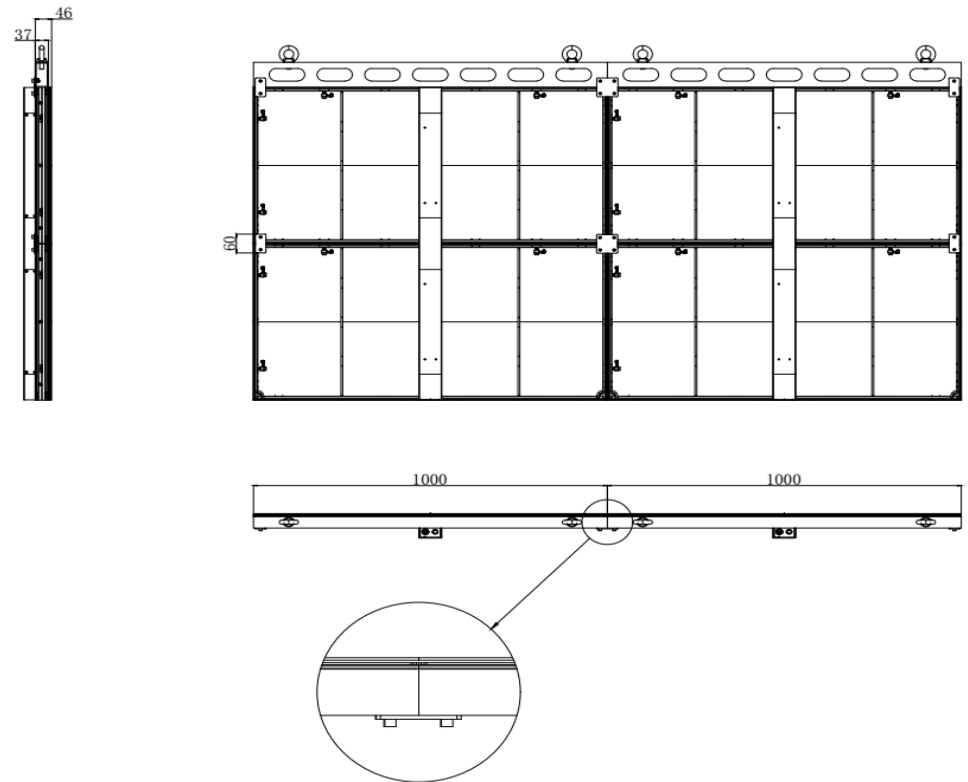



Installation Method: Glass Claw fixed

Application: elevator, building glass wall, airport station

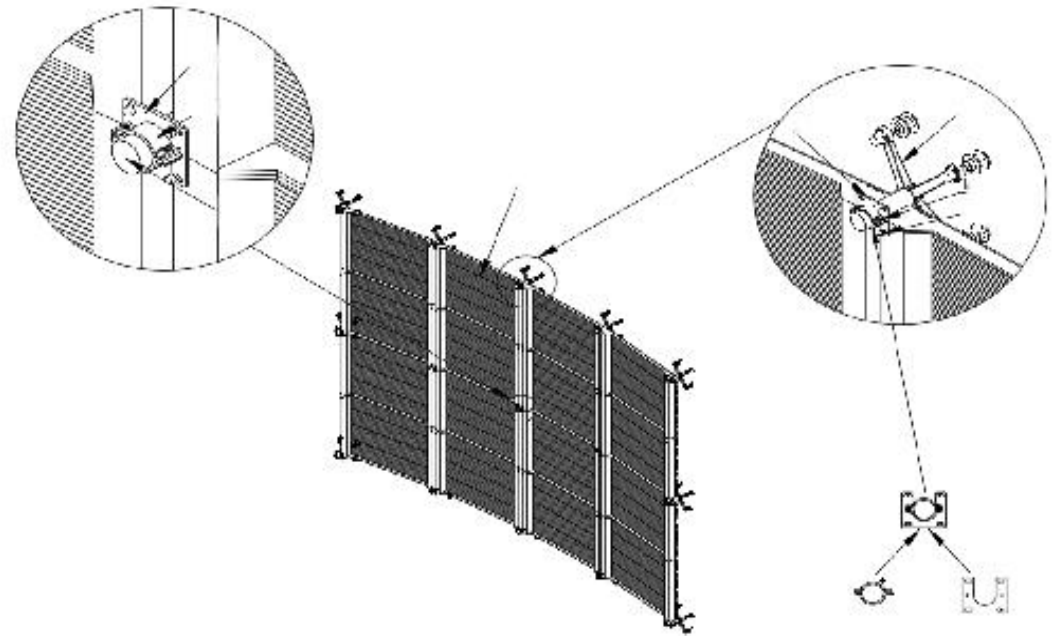



1 cabinet screws

2 connecting plates screws

3 Side cabinet connecting plates

4 Vertical cabinet connecting plates


5 Hanging bar screws

6 Module mask screw

7 Ground bar

8 Cabinet power cable

9 Cabinet signal cable

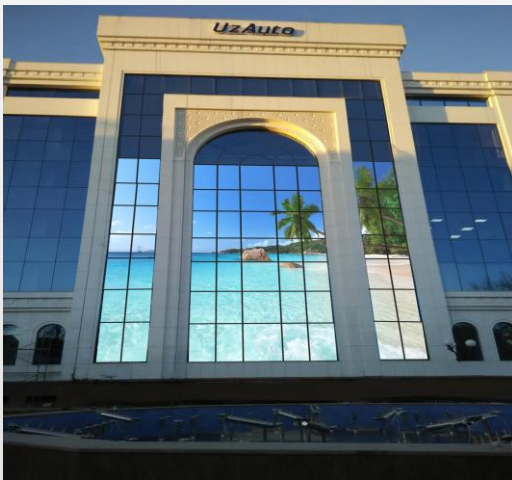

Project & Application

Specification for transparent led display P3.9-7.8

Pixel pitch	3.91-7.8mm	
LED configuration	SMD2020/SMD1921	
Brightness	1200/3500/5000nits	
Viewing angle	160°/ 140° (50% brightness)	
Scan mode	1/8	
Refresh rate	1920Hz	
Processing	16 bits	
Module size	500mm x 125 x 20mm (W x H x D)	19.69" x 4.92" x 0.78" (W x H x D)
Panel size	500mm x 1000 x 75mm (W x H x D)	19.69" x 39.37" x 2.95" (W x H x D)
Panel weight	4.5kg	
Input voltage	AC100~240V 50/60 HZ	
Power consumption (Avg)	120W/sqm	
Power consumption (Max)	400W/sqm	
Working temperature	-20°C~60°C	
IP rating	IP31/IP31	
Life span	100,000 hrs	
Warranty	24 months	